




Equus Short Roof Vent

Purpose & Areas of Use:

The Equus Short Roof Vent is designed primarily to vent the ceiling cavity and is normally located near or on the ridgeline. This vent is to be either glued or screwed into place. If screwed, they are to be stainless steel and counter sunk.

All flashing of penetration is to be done as per specifications set out in E2/AS1.

- Standard colours grey or black.
- Project specific detailing available to meet individual service requirements.

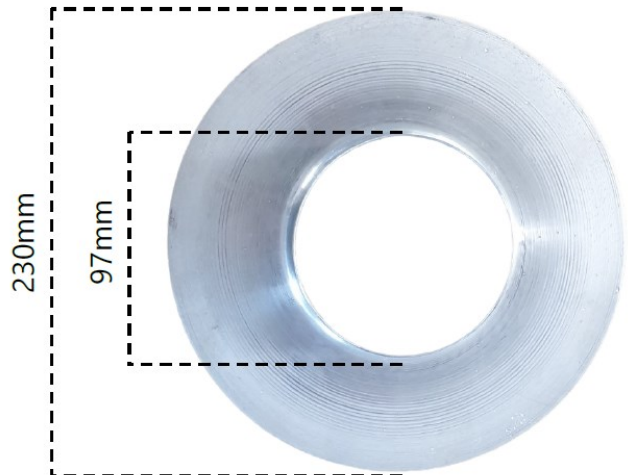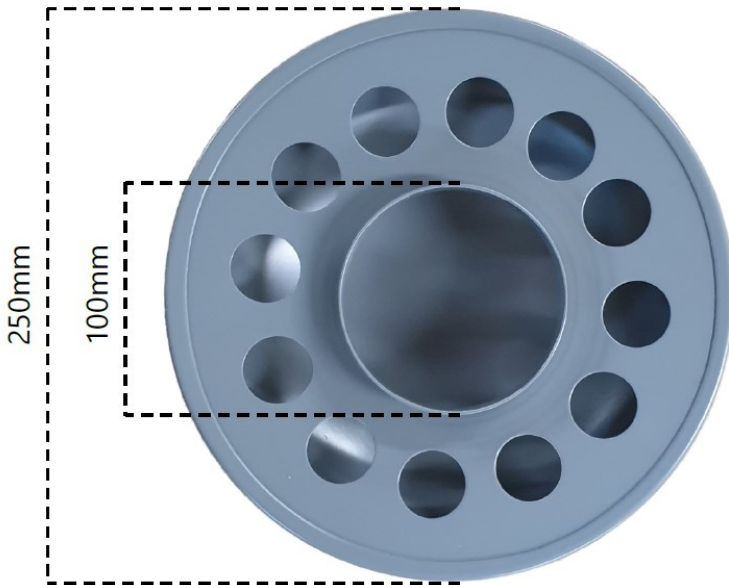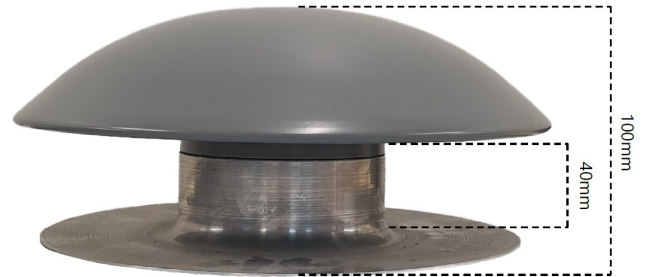

Equus Industries Ltd
PO Box 601
Blenheim
Phone: 03 578 0214
Email: admin@equus.nz
Web: www.equus.nz
May 2019