

# SL60

## Basic self levelling pedestal

June 2024

### DESCRIPTION:

Modules are used with self-levelling system in tile applications to create raised floors. Allow auto slope correction on surfaces maximum up to 5% gradient.



**BRANZ Appraised**  
Appraisal No.1157 [2021]



**BRANZ Appraised**  
Appraisal No.819 [2019]



**BRANZ Appraised**  
Appraisal No.520 [2019]



**BRANZ Appraised**  
Appraisal No.685 [2021]

### FEATURES:

Raw material	Polypropylene
Height range	Adjustable min.42 mm - max. 260 mm (Optionally, extra 'extension' can be used to increase the height more than 260 mm)
Base diameter	187 mm
Base wall thickness	3 mm
Head diameter	126 mm
Laying surface of base	302 cm <sup>2</sup>
Tab thickness	2 mm/3 mm/4 mm (removable)
Tab height	10 mm
Slope correction	% 5
Environmental impact assessment	Eco friendly

### APPLICATION AREAS:

Can be used for all indoor and outdoor areas. Also, on levelled surfaces, epoxy or membrane insulated areas.

### APPLICATION:


Use of any fixing material is not necessary. Optionally, the modules can be fixed to the application surface using adhesive or screw.

### RAW MATERIAL:

Carrier	Polypropylene
Product code	240 KTPH
Product colour	Black
Filler	Calcium carbonate (CaCO <sub>3</sub> )



### SL60 TECHNICAL DRAWING:

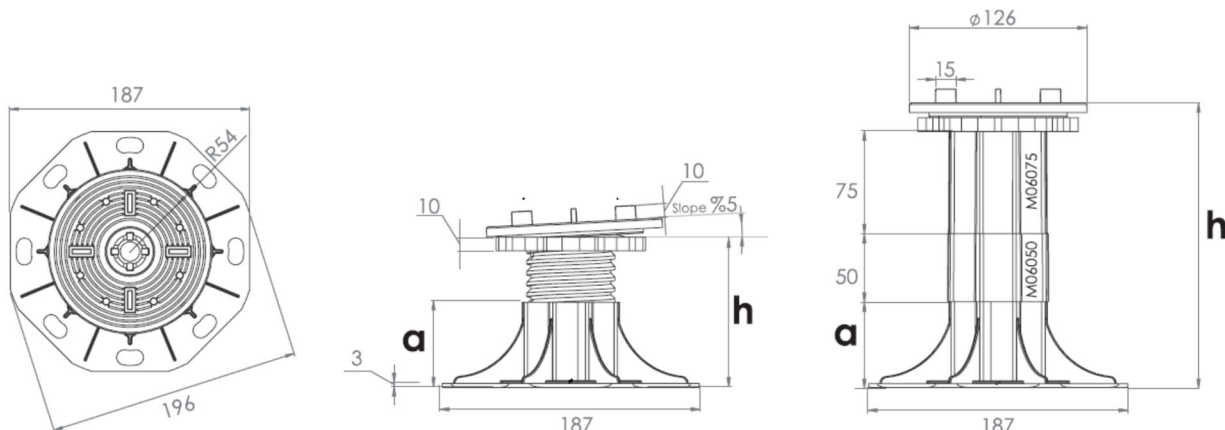

# SL60

## Basic self levelling pedestal




June 2024

### SL60 DIMENSION AND WEIGHT:

Model	SL60-01	SL60-02	SL60-03	SL60-04	SL60-05	SL60-06	SL60-07	SL60-08	SL60-09	SL60-10
a	18 mm	27 mm	40 mm	62 mm	40 mm	62 mm	62 mm	62 mm	62 mm	62 mm
h (min. - max)	42-48 mm	48-60 mm	60-85 mm	83-120 mm	112-140 mm	136-165 mm	157-194 mm	185-215 mm	210-235 mm	230-260 mm
Extension	-	-	-	-	M06050	M06050	M06075	M06050	M06050 M06075	M06075
Weight	0,243 kg	0,254 kg	0,271 kg	0,305 kg	-	-	-	-	-	-
Comp.										

### SL60 PRESSURE RESISTANCE:

Pressure measuring point

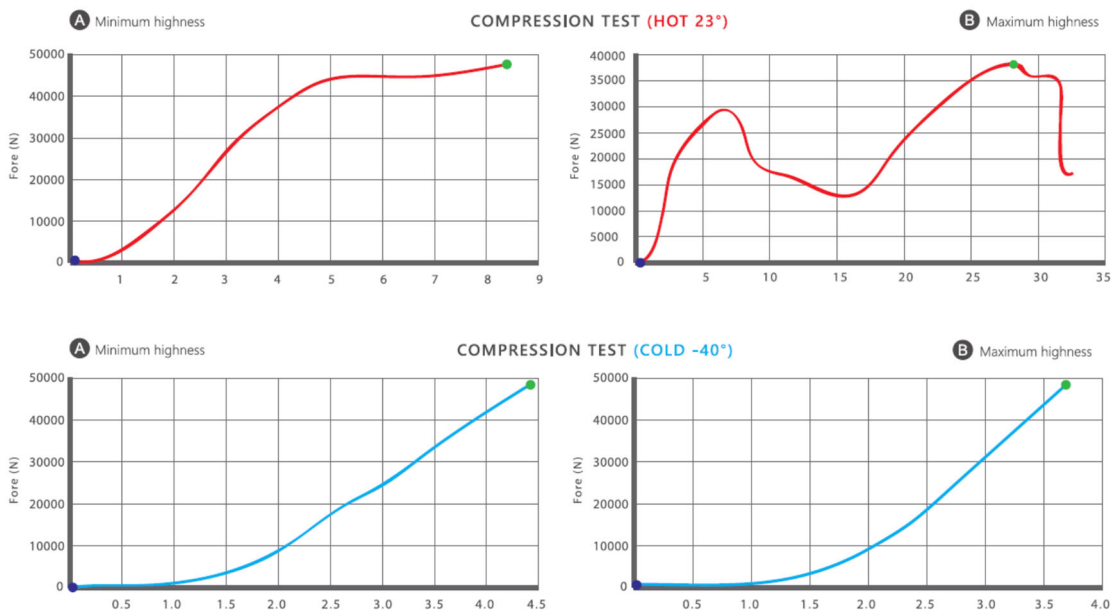

TESTED AND APPROVED BY HEADSHIP OF TURKISH STANDARDS INSTITUTION (TSE) AND CALIBRATION CENTER CONSTRUCTION MATERIALS LABORATORY (ANKARA CITY)

Equus Industries Ltd. 4 Sheffield St, Blenheim 7274 | Phone: 03 578 0214 | Email: info@equus.nz | Web: www.equus.nz

The information in this product data sheet is based on our experience and testing. It represents the latest information available at the time of printing, but no guarantee of its accuracy is made or implied, nor responsibility taken for use to which this information may be put. We reserve the right to alter or up-date information parameters and formulations at any time without notice.

# SL60

## Basic self levelling pedestal

June 2024

### SL60 PACKAGING INFORMATION:

Product code	SL60-01	SL60-02	SL60-03	SL60-04	M06050	M06075
Pcs per box	70*	60*	45*	35*	60***	40***
Gross weight per box	18,50 kg	16,65 kg	13,60 kg	12,10 kg	5,40 kg	4,00 kg
Boxes per pallet	12	12	12	12	48	48
Box dimensions	60cm x 40cm x h=40cm*		40cm x 30cm x h=41cm**		40cm x 30cm x h=20cm***	
Gross weight per pallet	247 kg	225 kg	189 kg	170 kg	285 kg	217 kg
Pallet dimensions	cm 80 x 120 x h140					

- Products are packed in cardboard boxes. Shrink-wrapped euro-pallets are used for final packaging. In spite of being shrink wrapped and rain proof packaging, it is recommended to keep the pallets in a closed area.
- The technical data products above indicate the current production. It may be updated or modified at any time without prior notice.
- We do not take any responsibility for any problem caused by misuse of the products.

### WARNINGS AND BANS:

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?	No
--	----

### MANUFACTURERS CONTACT DETAILS:

Manufacture location	Turkey
Legal and trading name of manufacturer	Ozturk Plastic Kalip San. Tic. Ltd. Sti.
Manufacturer address for service	Ikitelli Org.San.Bol. Mah. Enkoop Cad. No:4/C Blok Basaksehir / Istanbul
Manufacturer website	Www.fixplus.com.tr
Manufacturer email	orders@tremco.com.au
Manufacturer phone number	+90 212 485 24 53