

SL110

Maxi self levelling pedestal

June 2024

DESCRIPTION:

SL110 Series Pedestal Supports designed to construct raised floors at varying heights from 85 mm up to 660 mm and more. Used in tiling/paving applications with natural stone, ceramic and composite flooring materials. Thanks to 'self levelling module', I110 Series Supports allow auto correction on sloped surfaces maximum up to 5% gradient.



BRANZ Appraised
Appraisal No.1157 [2021]



BRANZ Appraised
Appraisal No.819 [2019]



BRANZ Appraised
Appraisal No.520 [2019]



BRANZ Appraised
Appraisal No.685 [2021]

FEATURES:

Raw material	Polypropylene
Height range	Adjustable min.85 mm - max. 660 mm
Base diameter	187 mm
Base wall thickness	3 mm
Head diameter	126 mm
Laying surface of base	302 cm ²
Tab thickness	2 mm/3 mm/4 mm (removable)
Tab height	10 mm
Slope correction	% 5
Environmental impact assessment	Eco friendly



APPLICATION AREAS:

Can be used for all indoor and outdoor areas. Also, on levelled surfaces, epoxy or membrane insulated areas.


APPLICATION:

Use of any fixing material is not necessary. Optionally, the modules can be fixed to the application surface using adhesive or screw.

RAW MATERIAL:

Carrier	Polypropylene
Product code	240 KTPH
Product colour	Black
Filler	Calcium carbonate (CaCO ₃)

SL110 TECHNICAL DRAWING:

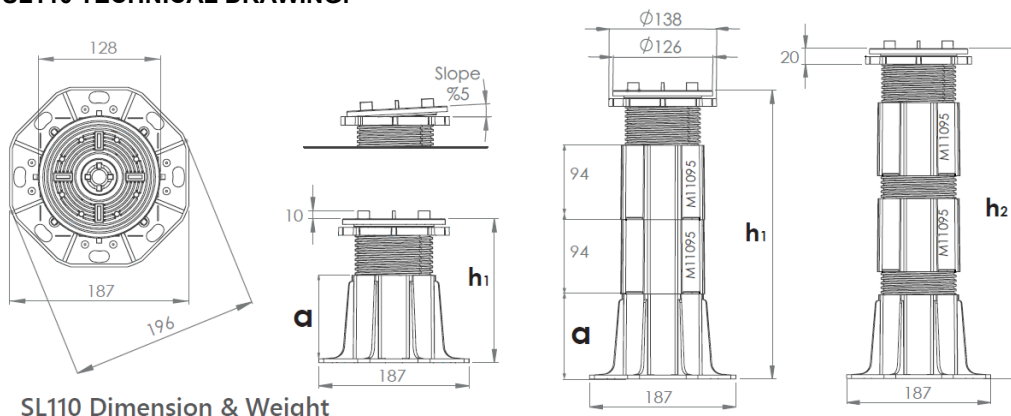

SL110 Dimension & Weight

SL110

Maxi self levelling pedestal







June 2024

SL110 DIMENSION AND WEIGHT:

Model	SL110-04	SL110-05	SL110-06	SL110-07	SL110-08	SL110-09	SL110-10	SL110-11	SL110-12	SL110-13
a	65 mm	109 mm	65 mm	109 mm	65 mm	109 mm	65 mm	109 mm	65 mm	109 mm
h1(min.- max)	85-135 mm	130-180 mm	180-228 mm	224-272 mm	273-322 mm	317-366 mm	367-415 mm	410-460 mm	460-510 mm	505-553 mm
h2	-	-	255 mm	300 mm	377 mm	420 mm	497 mm	540 mm	617 mm	660 mm
Extension	-	-	M11095	M11095	M11095	M11095	M11095	M11095	M11095	M11095
Weight	0,409 gr	0,481 gr	-	-	-	-	-	-	-	-
Comp.			 x1	 x1	 x2	 x2	 x3	 x3	 x4	 x4

SL110 PRESSURE RESISTANCE:

Pressure measuring point

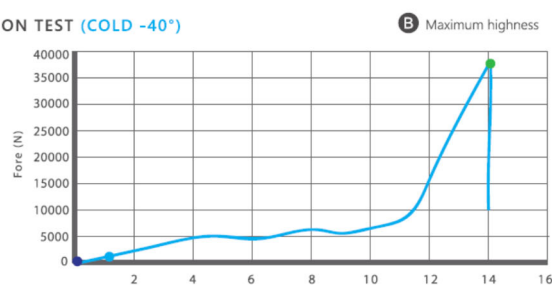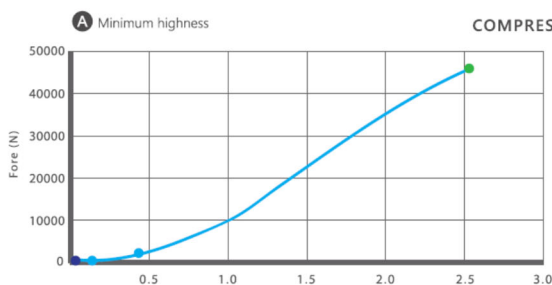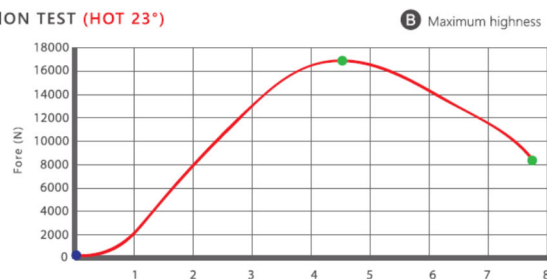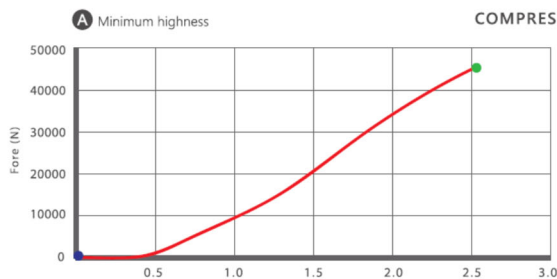

TESTED AND APPROVED BY HEADSHIP OF TURKISH STANDARDS INSTITUTION (TSE) AND CALIBRATION CENTER CONSTRUCTION MATERIALS LABORATORY (ANKARA CITY)

Equus Industries Ltd. 4 Sheffield St, Blenheim 7274 | Phone: 03 578 0214 | Email: info@equus.nz | Web: www.equus.nz

The information in this product data sheet is based on our experience and testing. It represents the latest information available at the time of printing, but no guarantee of its accuracy is made or implied, nor responsibility taken for use to which this information may be put. We reserve the right to alter or up-date information parameters and formulations at any time without notice.

SL110

Maxi self levelling pedestal

June 2024

SL110 PACKAGING INFORMATION:

Product code	SL110-04	SL110-05	SL110-06	SL110-07	M11095
Pcs per box	24*	20*	16*	14*	24**
Gross weight per box	11,25 kg	10,65 kg	11,15 kg	10,70 kg	5,40 kg
Boxes per pallet	12	12	12	12	24
Box dimensions	60cm x 40cm [*] x h=40cm	40cm x 30cm ^{**} x h=41cm	40cm x 30cm ^{***} x h=20cm		
Gross weight per pallet	160 kg	153 kg	159 kg	153 kg	155 kg
Pallet dimensions	cm 80 x 120 x h140				

- Products are packed in cardboard boxes. Shrink-wrapped euro-pallets are used for final packaging. In spite of being shrink wrapped and rain proof packaging, it is recommended to keep the pallets in a closed area.
- The technical data products above indicate the current production. It may be updated or modified at any time without prior notice.
- We do not take any responsibility for any problem caused by misuse of the products.

WARNINGS AND BANS:

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?	No
--	----

MANUFACTURERS CONTACT DETAILS:

Manufacture location	Turkey
Legal and trading name of manufacturer	Ozturk Plastic Kalip San. Tic. Ltd. Sti.
Manufacturer address for service	Ikitelli Org.San.Bol. Mah. Enkoop Cad. No:4/C Blok Basaksehir / Istanbul
Manufacturer website	Www.fixplus.com.tr
Manufacturer email	orders@tremco.com.au
Manufacturer phone number	+90 212 485 24 53