



INSULATION


SOPRA-ISO

THERMAL INSULATION

ROOFS

HIGH PERFORMANCE POLYISOCYANURATE FOAM

Compliance with
AS/ANZ 4859.1

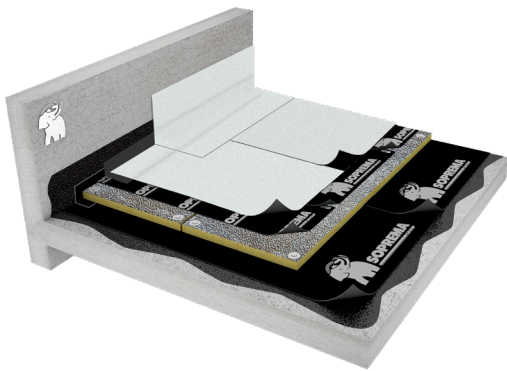

SOPRA-ISO is a high performance thermal insulation board, composed of closed-cell polyisocyanurate (PIR) foam laminated on both sides, with a textured aluminium facer providing great fire resistance.

SOPRA-ISO has amongst the highest thermal values of the rigid board insulation products, giving buildings continued thermal efficiency throughout their life span.

SOPRA-ISO is mainly used as thermal insulation for SOPREMA bitumen, PVC and TPO roofing systems. It has a light weight closed cell foam core which makes it easy to handle and allows fast fixing to any application.

- Superior thermal values
- Superior compressive strength
- Great dimensional stability
- Great fire resistance


APPLICATION

SOPRA-ISO boards are mechanically fastened with screws and stress plates.

The waterproofing membrane system can be loose-aid under ballast, mechanically fastened, or self-adhered.

THERMAL PERFORMANCE

THICKNESS	R VALUE	THERMAL CONDUCTIVITY
50mm	R _d 2.35 m ² K/W	0.021 W/m·K
60mm	R _d 2.85 m ² K/W	0.021 W/m·K
70mm	R _d 3.30 m ² K/W	0.021 W/m·K
80mm	R _d 4.00 m ² K/W	0.020 W/m·K
90mm	R _d 4.50 m ² K/W	0.020 W/m·K
100mm	R _d 5.00 m ² K/W	0.020 W/m·K

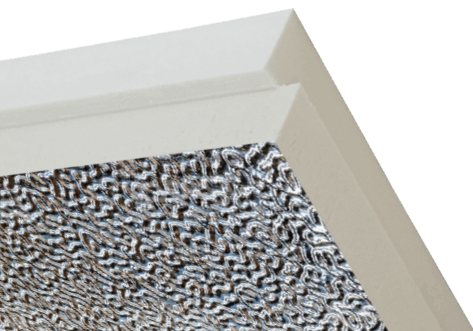

WWW.EQUUS.NZ

INFO@EQUUS.NZ