

Tile Requirements and Jack Layouts Guide for the Queen and Lord Range

Jack Requirements per m²













TILE SIZE mm x mm	200	300	400	450	500	600	800	900	1000
200	25	16.6	12.5	11.1	10	8.3	12.5	11.1	10
300	16.6	11.1	8.3	7.4	6.6	5.5	8.3	7.4	6.6
400	12.5	8.3	6.25	5.5	5	4.2	6.25	5.5	5
450	11.1	7.4	5.5	4.9	4.4	3.7	5.5	4.9	4.4
500	10	6.6	5	4.4	4	3.3	5	4.4	4
600	8.3	5.5	4.2	3.7	3.3	2.7	4.2	3.7	3.3
800	12.5	8.3	6.25	5.5	5	4.2	6.25	5.5	5
900	11.1	7.4	5.5	4.9	4.4	3.7	5.5	4.9	4.4
1000	10	6.6	5	4.4	4	3.3	5	4.4	4
1200	8.3	5.5	4.2	3.7	3.3	2.7	4.2	3.7	3.3
1400	7.14	4.8	3.6	3.2	2.9	2.4	3.6	3.2	2.9
1600	12.5	8.3	6.25	5.5	5	4.2	6.25	5.5	5
1800	8.3	5.5	4.2	3.7	3.3	2.7	4.2	3.7	3.3

Note: This table assumes an infinite terrace with no perimeter constraints and provides an approximate indication of material requirements. The figures represent the minimum number of Jacks required per m² for each tile format and do not allow for wastage or site-specific conditions. The number of Jacks required per m² will increase on smaller terrace areas due to perimeter and edge conditions. Please contact Equus Industries for project-specific assessment.



Layouts for the Queen and Lord Range

Tile Formats & Jack Requirements

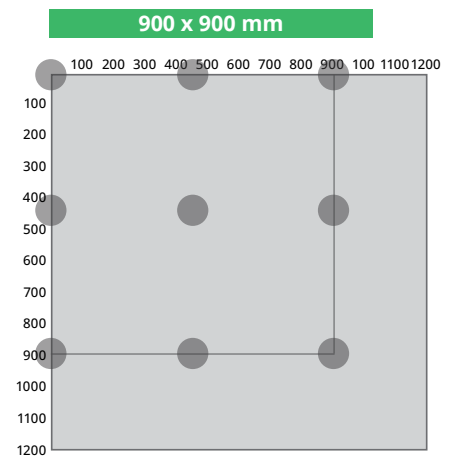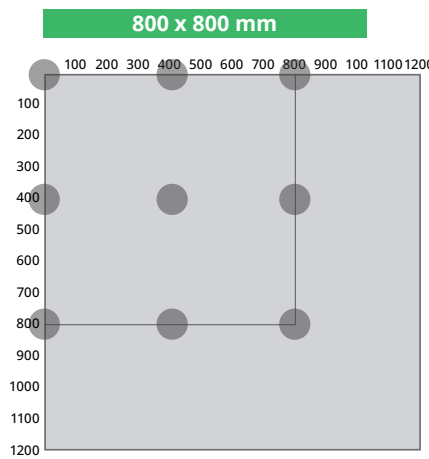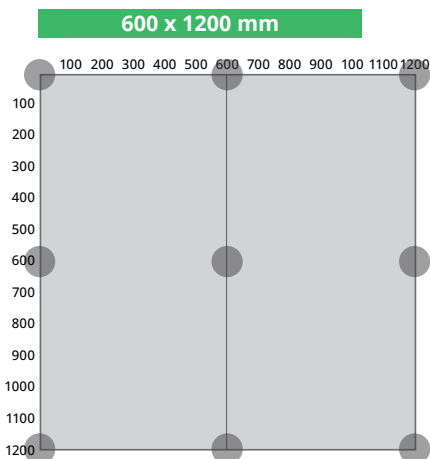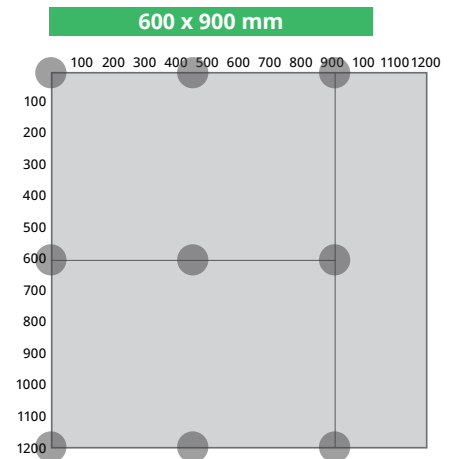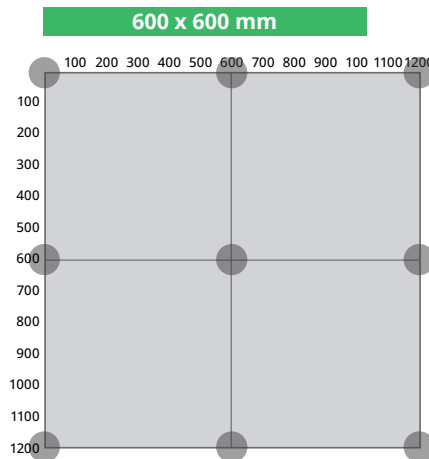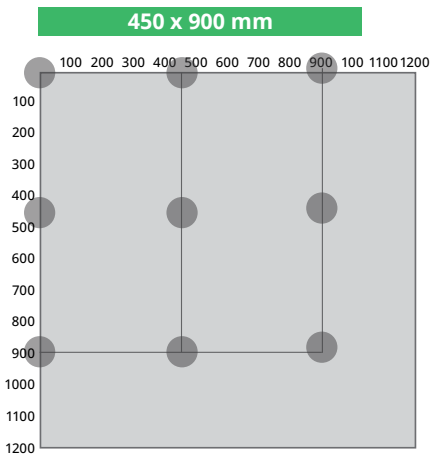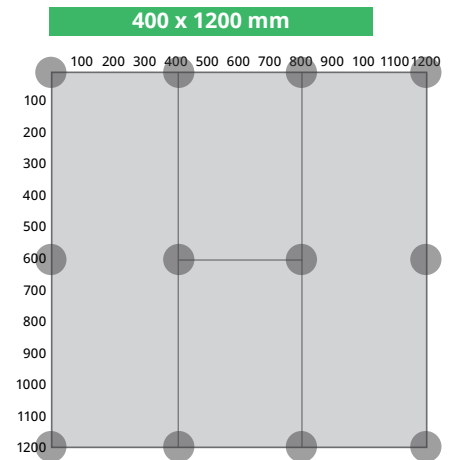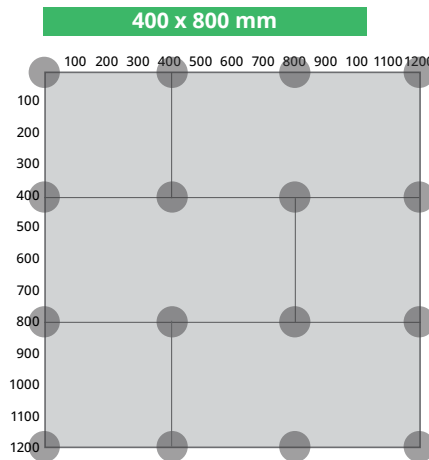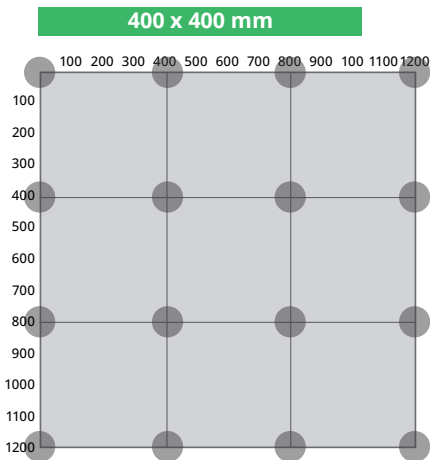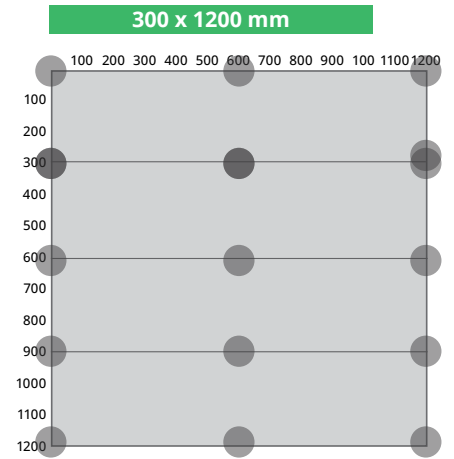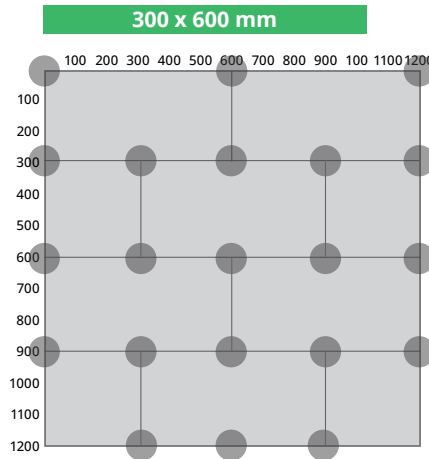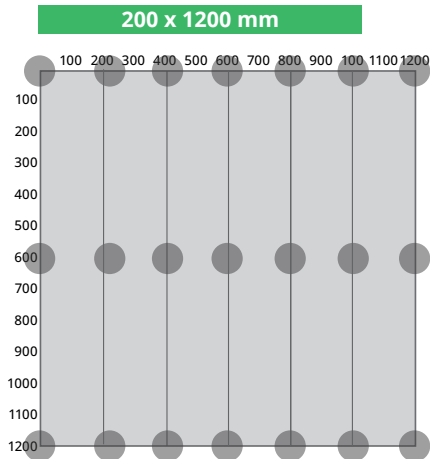



EQUUS NORTHERN
Auckland | Ph: 09 415 4314

EQUUS CENTRAL
Wellington | Ph: 04 576 0333

info@equus.nz
www.equus.nz

EQUUS SOUTHERN
Christchurch | Ph: 03 353 2434

NEW ZEALAND DISTRIBUTOR FOR:



dps solving
innovative Italian Solutions