

EQUUS TERMINATION BAR

July 2024

DESCRIPTION:

The Equus Termination Bar is a pre-manufactured profile that terminates the waterproofing membrane at the wall in a professional and watertight, wind-peel resistant manner with the addition of 50 mm flange for securing drainage board.


The Equus Termination Bar is used at concrete or wooden walls and curbs.

GENERAL USE:

Tanking situations where backfill covers membrane and termination bar.

ADVANTAGES:

- Increases the durability of the waterproofing system.
- Increases the bonding of the waterproofing to the wall or curb.
- Wind-peel resistant.
- Corrosion resistant.
- Continuous quality.
- Provides an aesthetical, straight finishing.
- Provides a dripping point off the wall.
- Predrilled holes
- Lip for securing drainage layer.

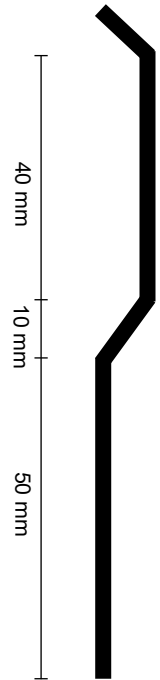

TECHNICAL DATA:

Characteristics	
Material	Extruded aluminium profile (Al Mg Si 0.5 F22 quality)
Tensile strength	215 N/mm ²
Yield point	160 N/mm ²
Elongation	10%
Hardness	70 brinell
Length	2400 mm
Width	110 mm
Colour	Metallic
Thickness	2 mm
Predrill	200 mm

INSTALLATION:

- The waterproofing is installed according to manufacturers details.
- The Equus Termination Bar is fastened at the edge of the waterproofing membrane into the wall.
- The space created at the top of the Equus Termination Bar is filled with a sealant compatible to the wall’s material, bitumen and aluminium. Equus recommends Alsan Mastic 2000.

WARNINGS AND BANS:

Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004?	No
--	----



EQUUS TERMINATION BAR

July 2024**MANUFACTURERS CONTACT DETAILS:**

Manufacture location	
Legal and trading name of manufacturer	
Manufacturer address for service	
Manufacturer website	
Manufacturer email	
Manufacturer phone number	
Manufacturer NZBN	