

SL110

Maxi self-levelling pedestal

January 2025

DESCRIPTION:

SL110 Series Pedestal Supports designed to construct raised floors at varying heights from 85 mm up to 660 mm and more. Used in tiling/paving applications with natural stone, ceramic and composite flooring materials. Thanks to 'self-levelling module', I110 Series Supports allow auto correction on sloped surfaces maximum up to 5% gradient.



FEATURES:

| | |
|---------------------------------|------------------------------------|
| Raw material | Polypropylene |
| Height range | Adjustable min.85 mm - max. 660 mm |
| Base diameter | 187 mm |
| Base wall thickness | 3 mm |
| Head diameter | 126 mm |
| Laying surface of base | 302 cm ² |
| Tab thickness | 2 mm/3 mm/4 mm (removable) |
| Tab height | 10 mm |
| Slope correction | % 5 |
| Environmental impact assessment | Eco friendly |



APPLICATION AREAS:

Can be used for all indoor and outdoor areas. Also, on levelled surfaces, epoxy or membrane insulated areas.


APPLICATION:

Use of any fixing material is not necessary. Optionally, the modules can be fixed to the application surface using adhesive or screw.

RAW MATERIAL:

| | |
|----------------|--|
| Carrier | Polypropylene |
| Product code | 240 KTPH |
| Product colour | Black |
| Filler | Calcium carbonate (CaCO ₃) |

SL110 TECHNICAL DRAWING:

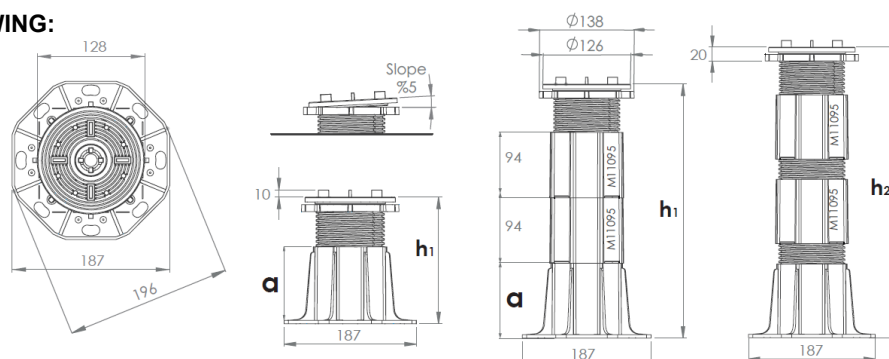

SL110

Maxi self-levelling pedestal



January 2025

SL110 DIMENSION AND WEIGHT:

| Model | SL110-04 | SL110-05 | SL110-06 | SL110-07 | SL110-08 | SL110-09 | SL110-10 | SL110-11 | SL110-12 | SL110-13 |
|---------------|--|--|---|---|---|---|---|---|---|---|
| a | 65 mm | 109 mm | 65 mm | 109 mm | 65 mm | 109 mm | 65 mm | 109 mm | 65 mm | 109 mm |
| h1(min.- max) | 85-135 mm | 130-180 mm | 180-228 mm | 224-272 mm | 273-322 mm | 317-366 mm | 367-415 mm | 410-460 mm | 460-510 mm | 505-553 mm |
| h2 | - | - | 255 mm | 300 mm | 377 mm | 420 mm | 497 mm | 540 mm | 617 mm | 660 mm |
| Extension | - | - | M11095 | M11095 | M11095 | M11095 | M11095 | M11095 | M11095 | M11095 |
| Weight | 0,409 gr | 0,481 gr | - | - | - | - | - | - | - | - |
| Comp. |  |  |  x1 |  x1 |  x2 |  x2 |  x3 |  x3 |  x4 |  x4 |

SL110 PRESSURE RESISTANCE:

Pressure measuring point

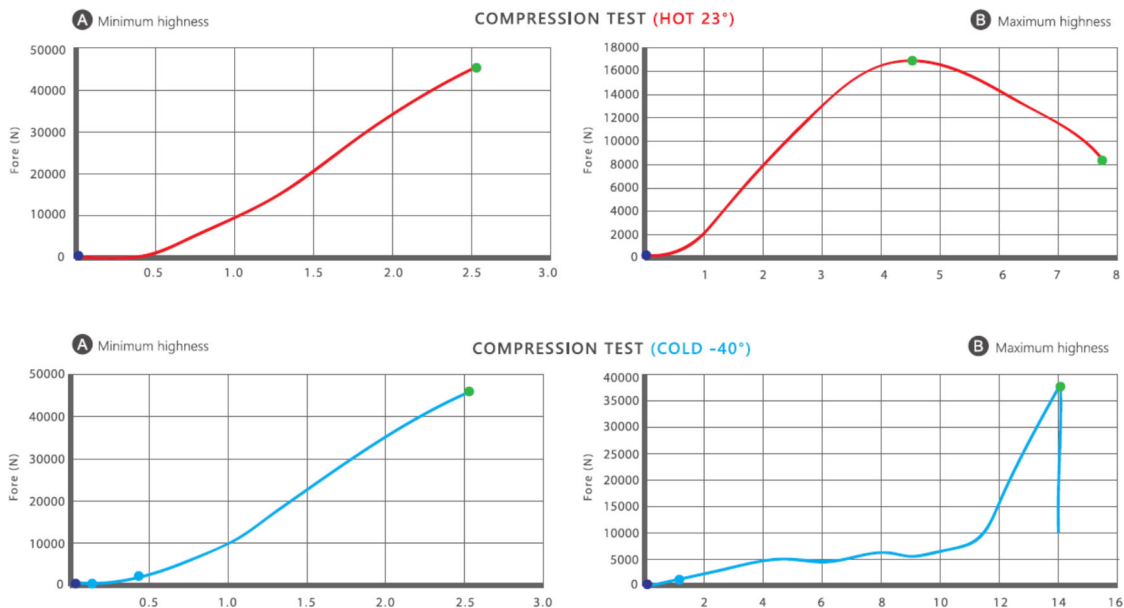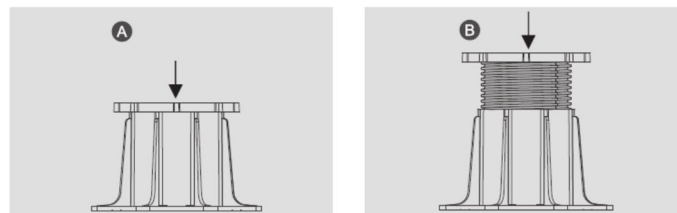

TESTED AND APPROVED BY HEADSHIP OF TURKISH STANDARDS INSTITUTION (TSE) AND CALIBRATION CENTER CONSTRUCTION MATERIALS LABORATORY (ANKARA CITY)

SL110

Maxi self-levelling pedestal

January 2025

SL110 PACKAGING INFORMATION:

| Product code | SL110-04 | SL110-05 | SL110-06 | SL110-07 | M11095 |
|-------------------------|-----------------------------------|------------------------------------|-------------------------------------|----------|---------|
| Pcs per box | 24* | 20* | 16* | 14* | 24** |
| Gross weight per box | 11,25 kg | 10,65 kg | 11,15 kg | 10,70 kg | 5,40 kg |
| Boxes per pallet | 12 | 12 | 12 | 12 | 24 |
| Box dimensions | 60cm x 40cm x h=40cm [*] | 40cm x 30cm x h=41cm ^{**} | 40cm x 30cm x h=20cm ^{***} | | |
| Gross weight per pallet | 160 kg | 153 kg | 159 kg | 153 kg | 155 kg |
| Pallet dimensions | cm 80 x 120 x h140 | | | | |

- Products are packed in cardboard boxes. Shrink-wrapped euro-pallets are used for final packaging. In spite of being shrink-wrapped and rain proof packaging, it is recommended to keep the pallets in a closed area.
- The technical data products above indicate the current production. It may be updated or modified at any time without prior notice.
- We do not take any responsibility for any problem caused by misuse of the products.

WARNINGS AND BANS:

| | |
|--|----|
| Is the building product/building product line subject to warning or ban under section 26 of the Building Act 2004? | No |
|--|----|

MANUFACTURERS CONTACT DETAILS:

| | |
|--|---|
| Manufacture location | Turkey |
| Legal and trading name of manufacturer | Ozturk Plastic Kalip San. Tic. Ltd. Sti. |
| Manufacturer address for service | Ikitelli Org.San.Bol. Mah. Enkoop Cad. No:4/C Blok Basaksehir / Istanbul |
| Manufacturer website | Www.fixplus.com.tr |
| Manufacturer email | orders@tremco.com.au |
| Manufacturer phone number | +90 212 485 24 53 |